




281

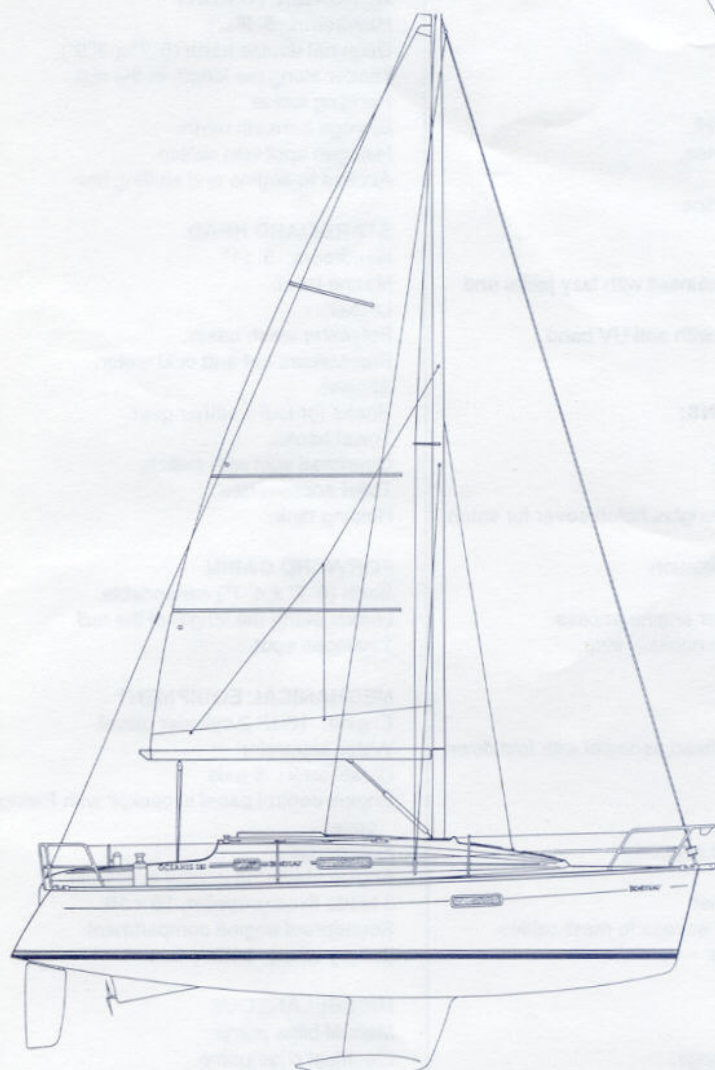


SPECIFICATIONS

Designer	Groupe Finot	
L.O.A	28' 6"	8.70 m
L.W.L.	24' 3"	7.38 m
Max. Beam	9' 5"	2.86 m
Draft (lead bulb)	4' 0"	1.23 m
Displacement	5732 lbs	2600 kg
Ballast	1675 lbs	760 kg
Sail Area (100%)	341 sq. ft.	31.68 sq m
Engine	18 hp	
Fuel	8 gals	30 L
Water	50 gals	189 L
Mast Ht over water	38' 8"	11.74 m

RIG DIMENSIONS

I	33' 4"	10.16 m
J	10' 1"	3.07m
Classic Mast	P 29' 6"	9.0 m
Roller Furling Mast	P 29' 6"	9.0 m
E	11' 4"	3.46m

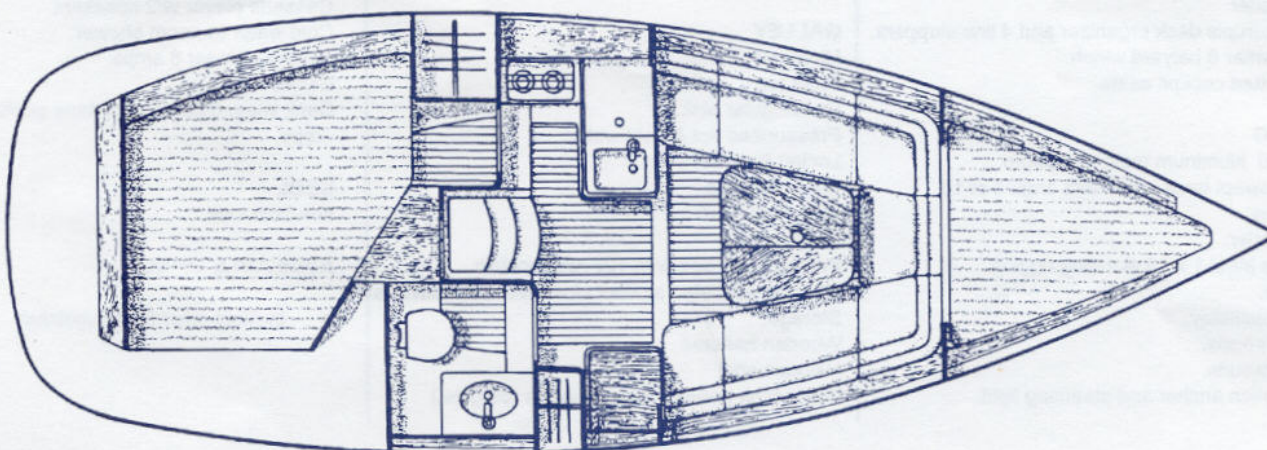

SPECIFICATIONS

OCEANIS 281

Includes all standard equipment listed below, F.O.B. East Coast P.O.E.

CONSTRUCTION:

HULL: Laminated G.R.P. hull with internal fiberglass hull liner, reinforced with unidirectional rovings

DECK: Balsa sandwich for stiffness plus thermal and acoustic insulation. Deck liner for additional insulation and easy maintenance

INTERIOR WOOD: Varnished cherry stained mahogany.

DECK EQUIPMENT:

Stemhead fitting, anodized aluminum with anchor roller and built-in fairleads with rollers. Self bailing anchor locker with pull ring handle.

Anodized aluminum toerails, fairleads with rollers at aft end of toerails.

Stainless steel pulpit with bicolor navigation light, stainless steel stern pulpit.

Stainless steel stanchions 24" high, double lifelines with big gates.

4 moorings cleats.

Self bailing cockpit with transom seat opening to swim platform.

Sail locker.

Winch handle pocket.

Coachroof - 1 low profile Lewmar size 30 opening forehatch (15 5/8" x 20 3/4"), 1 fixed skylight (15" x 20 1/8") aft of the mast.

Coachroof sides - 2 Lewmar size 4 opening portlights (7 5/8" x 25 5/8"), 2 Lewmar size 1 opening portlights (7 5/8" x 14 1/2").

Cockpit - 1 Lewmar size 0 opening portlight (7" x 12 7/8").

Transom - 1 Lewmar size 0 opening portlight (7" x 12 7/8").

Hull - 2 fixed portholes (5 3/4" x 19 1/2").

Fiberglass companionway sliding hatch with plexi skylight.

Inboard genoa tracks along cabin side.

Mainsheet system.

Varnished companionway drop boards.

Two Lewmar 26 self tailing genoa sheet winches. Stern light, Fuel filler deck fitting, Water filler deck fitting.

Pedestal steering system with 32" stainless steel wheel with brake and binnacle.

Swim ladder.

One quadruple deck organizer and 4 line stoppers.

One Lewmar 8 halyard winch.

Teak slatted cockpit seats.

RIGGING

Anodized aluminum mast and boom.

1 set of swept back spreaders angled at 15 degrees.

Genoa furler.

Stainless steel 1 x 19 standing rigging.

Forestay.

Double backstay.

Upper shrouds.

Lower shrouds.

Combination anchor and steaming light.

RUNNING RIGGING

Mainsail halyard.

Genoa halyard.

Rigid vang.

Mainsheet.

Genoa sheets.

Main boom topping lift.

2 mainsail reefing lines.

Mainsail outhaul.

Genoa roller furling line.

Sails:

Semi full battened mainsail with lazy jacks and cover.

130% furling genoa with anti UV band.

Sail bags.

ACCOMMODATIONS:

COMPANIONWAY

Headroom: 6' 3".

Sliding polyester Plexiglas hatch cover for salon lighting.

Hatch door with ventilation.

Two handrails.

Removable steps, for engine access.

Polyester steps with nonskid strip.

SALON

Headroom: 6' 1"

Salon table with on fixed pedestal with fold down side.

Bench seat.

Locker.

Stainless steel mast support.

1 halogen spot.

Molded overhead liner.

Inspection hatch for access to mast cables.

Wooden floorboards.

NAV. STATION

Headroom: 5' 9".

Chart table with storage.

Area for instruments.

6-function electrical panel.

Halogen spot.

GALLEY

Headroom: 5' 9".

Work top.

Rectangular sink.

Pressurized hot & cold water.

Locker beneath sink.

Sliding basket.

Cutlery drawer.

Trash can.

Polyester ice box with 12v refrigeration

2 burner gimbaled alcohol stove with protective rail. Storage.

Wooden handrail.

Halogen spot.

Water tank beneath forward berth (50 gals.)

AFT CABIN TO PORT

Headroom: 5' 9".

Diagonal double berth (6' 7" x 3' 9").

Locker along the length of the hull.

Hanging locker.

Storage beneath berth.

Halogen spot with switch.

Access to engine and stuffing box.

STARBOARD HEAD

Headroom: 5' 11".

Marine toilet.

Locker.

Polyester wash basin.

Pressurized hot and cold water.

Shower.

Hooks for foul weather gear.

Towel hooks.

Overhead light with switch.

Toilet accessories.

Holding tank.

FORWARD CABIN

Berth (6' 7" x 4' 7") expandable.

Locker along the length of the hull.

1 halogen spot.

MECHANICAL EQUIPMENT

Engine: 18HP 2 cylinder diesel.

Water separator.

Diesel tank: 8 gals.

Engine control panel in cockpit with Plexiglas cover

Fuel gauge.

Engine start/stop control in cockpit.

3 blade fixed propeller, 16 x 19.

Soundproof engine compartment.

Battery wiring, battery box.

MISCELLANEOUS

Manual bilge pump.

Electrical bilge pump.

Winch handle.

Briefcase & Owner's Manual.

110 v system with 2 outlets.

Cassette player w/2 speakers.

Cold water transom shower.

Battery charger 8 amps.

Cradle

Dock lines, 6 fenders, brittany anchor, chain, rope.

KEEL

Iron bulb keel.

AVAILABLE OPTION

◆ In-mast roller furling mainsail